


RHINO TRED - STNR SURFACE MOUNT

2" ABRASIVE + CONTRASTING STRIPE OR PHOTOLUMINESCENT NOSING
(SHOP APPLIED OR ON SITE BY OTHERS)

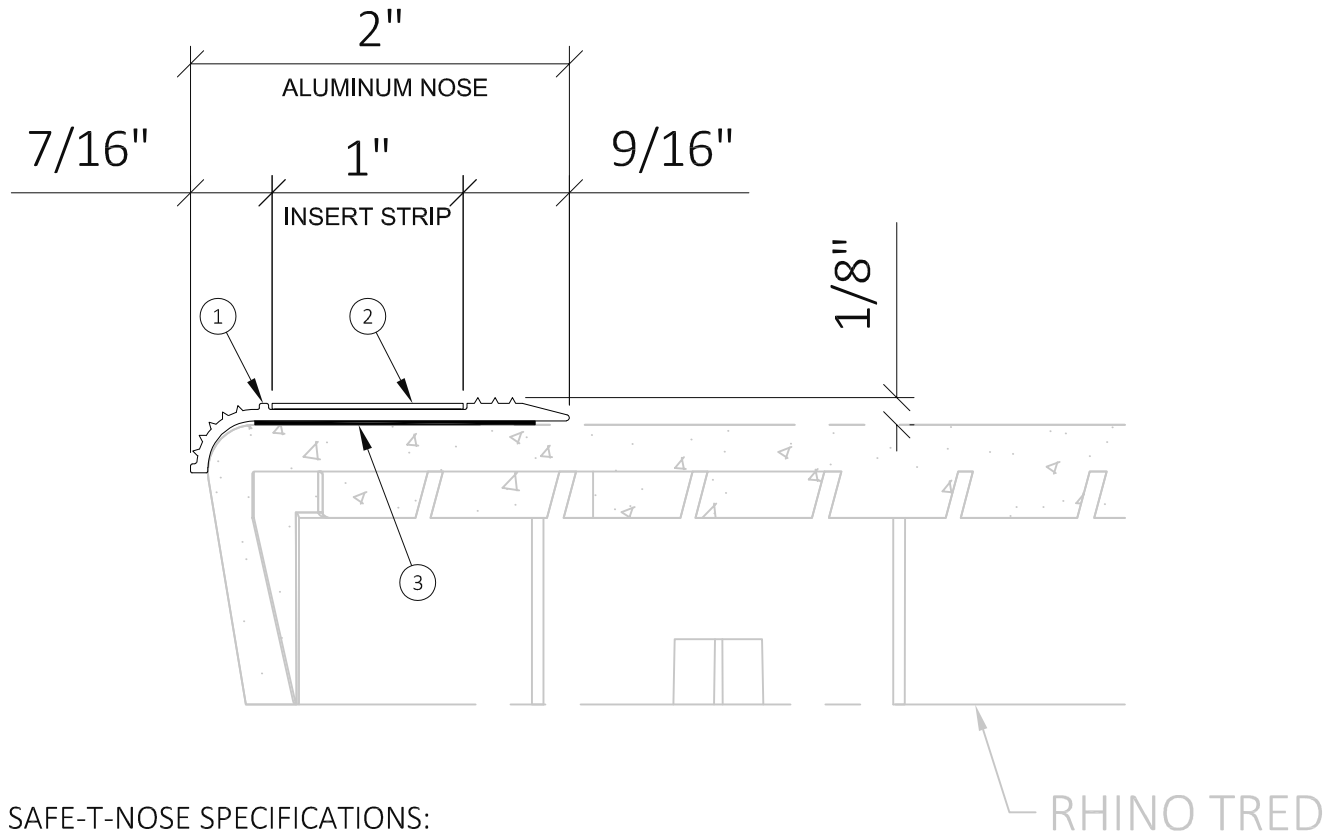

SAFE-T-NOSE SPECIFICATIONS:

1. EXTRUDED ALUMINUM ALLOY 6063-T5
 - ☐ (a) Mill Finish
 - ☐ (b) Clear Anodize
 - ☐ (c) Yellow Powder Coat
 - ☐ (d) Black Powder Coat
2. 1" INSERT STRIP (shop applied):
 - ☐ (a) Photo-Glo STNF
 - ☐ (b) Photo-Glo S9203
 - ☐ (c) Traction Yellow
 - ☐ (d) Traction Black
 - ☐ (e) Ribbed Aluminum
3. ATTACHMENT:
 - ☐ (a) Excluded (install by others)
 - ☐ (b) Liquid Adhesive (shop applied)
 - ☐ (c) Mechanical Screw (shop applied)
4. NOSING LENGTH: Equal To Tread Width
5. ASTM 2072 / UL 1994

Safe-T-Nose®
WWW.SAFETNOSE.COM

1-855-723-6673
SALES@SAFETNOSE.COM



(971) 772-4553 | sales@nationalstair.com | www.nationalstair.com

RHINO TRED - STNR FLUSH MOUNT
MODEL # RT-PC150-SG-STNR




SCALE: N.T.S.

DWG #: RT-0.2

RHINO TRED - STNR FLUSH MOUNT

2" ABRASIVE + CONTRASTING STRIPE OR PHOTOLUMINESCENT NOSING
(SHOP APPLIED ONLY)

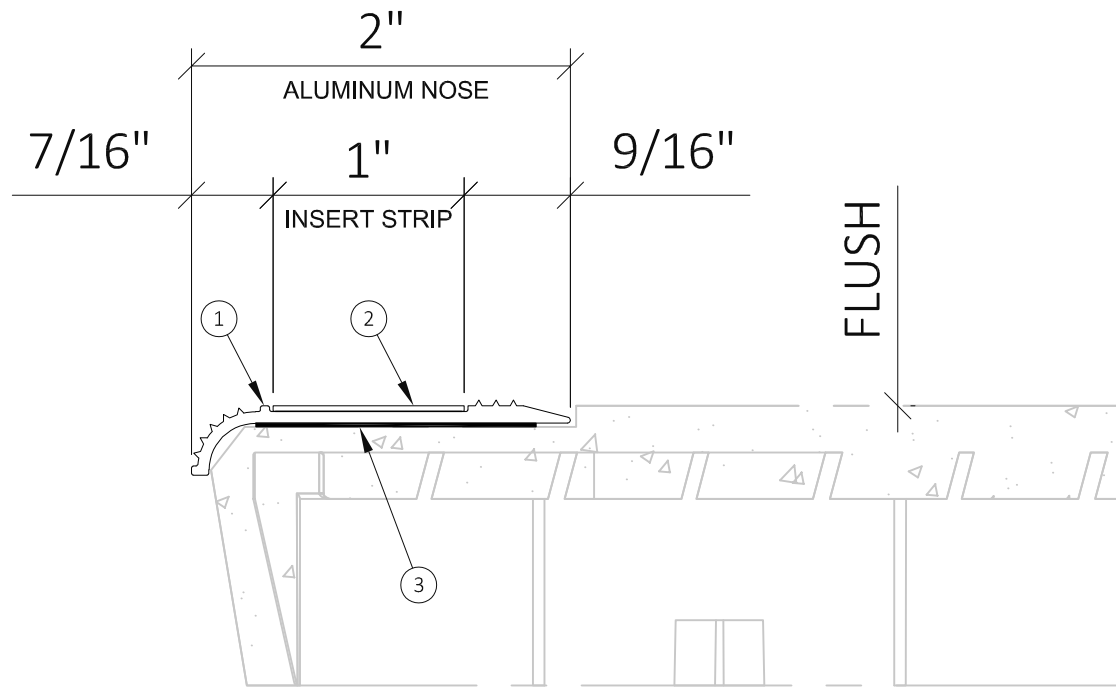

SAFE-T-NOSE SPECIFICATIONS:

- ①. EXTRUDED ALUMINUM ALLOY 6063-T5
 - ☐ (a) Mill Finish
 - ☐ (b) Clear Anodize
 - ☐ (c) Yellow Powder Coat
 - ☐ (d) Black Powder Coat
- ②. 1" INSERT STRIP (shop applied):
 - ☐ (a) Photo-Glo STNF
 - ☐ (b) Photo-Glo S9203
 - ☐ (c) Traction Yellow
 - ☐ (d) Traction Black
 - ☐ (e) Ribbed Aluminum
- ③. ATTACHMENT:
 - ☐ (a) Liquid Adhesive (shop applied)
4. NOSING LENGTH: Equal To Tread Width
5. ASTM 2072 / UL 1994

Safe-T-Nose®
WWW.SAFETNOSE.COM

1-855-723-6673
SALES@SAFETNOSE.COM



(971) 772-4553 | sales@nationalstair.com | www.nationalstair.com

RHINO TRED - STNR FLUSH MOUNT
MODEL # RT-PC150-SG-STNR




SCALE: N.T.S.

DWG #: RT-0.3

RHINO TRED - STNS FLUSH MOUNT

1 1/2" ABRASIVE + CONTRASTING STRIPE OR PHOTOLUMINESCENT NOSING
(SHOP APPLIED ONLY)

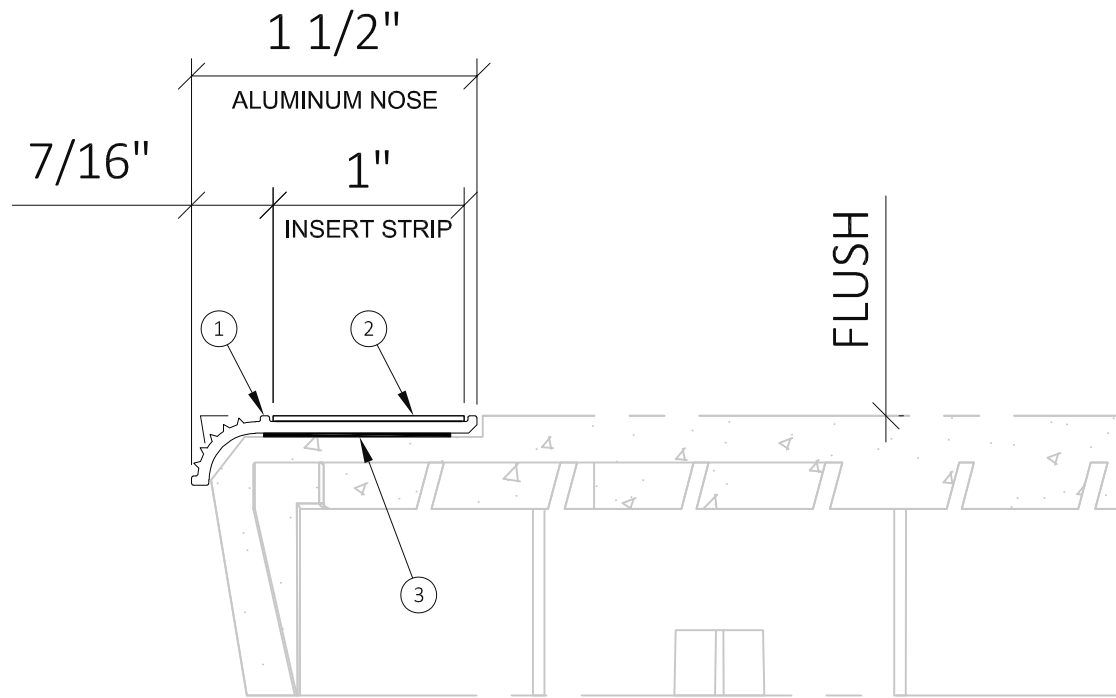

SAFE-T-NOSE SPECIFICATIONS:

- ①. EXTRUDED ALUMINUM ALLOY 6063-T5
 - ☐ (a) Mill Finish
 - ☐ (b) Clear Anodize
 - ☐ (c) Yellow Powder Coat
 - ☐ (d) Black Powder Coat
- ②. 1" INSERT STRIP (shop applied):
 - ☐ (a) Photo-Glo STNF
 - ☐ (b) Photo-Glo S9203
 - ☐ (c) Traction Yellow
 - ☐ (d) Traction Black
 - ☐ (e) Ribbed Aluminum
- ③. ATTACHMENT:
 - ☐ (a) Liquid Adhesive (shop applied)
4. NOSING LENGTH: Equal To Tread Width
5. ASTM 2072 / UL 1994

Safe-T-Nose®
WWW.SAFETNOSE.COM

1-855-723-6673
SALES@SAFETNOSE.COM



(971) 772-4553 | sales@nationalstair.com | www.nationalstair.com

RHINO TRED - STNS FLUSH MOUNT
MODEL # RT-PC150-SG-STNS




SCALE: N.T.S.

DWG #: RT-0.4

RHINO TRED - STNC3 EMBEDDED

3" ABRASIVE + CONTRASTING STRIPE OR PHOTOLUMINESCENT NOSING
(SHOP APPLIED ONLY)

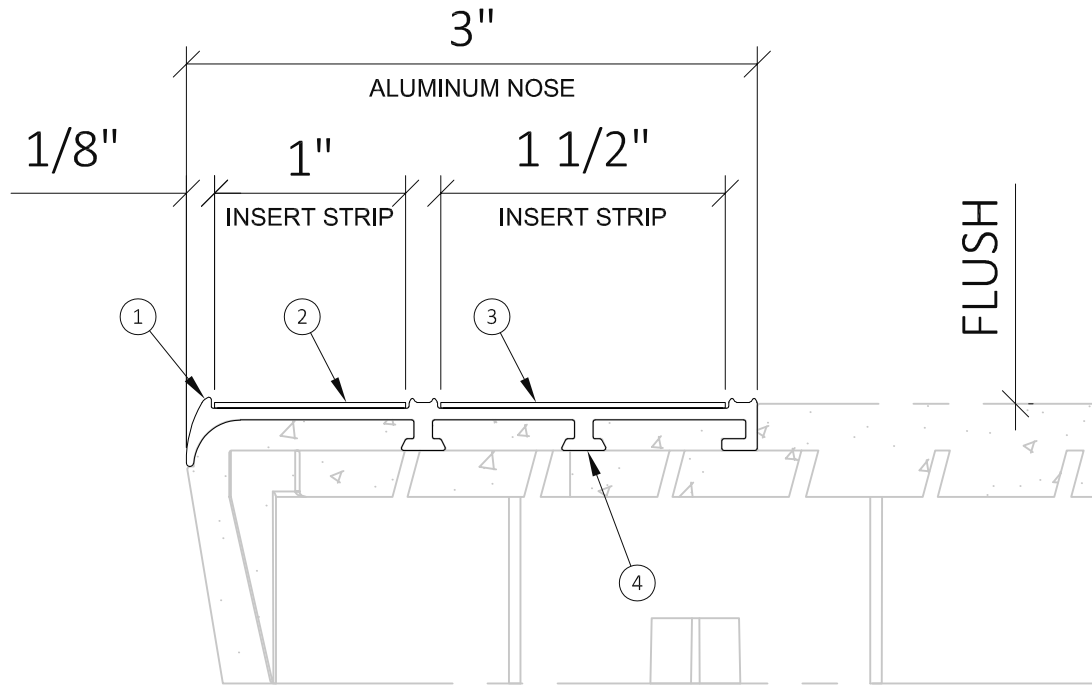

SAFE-T-NOSE SPECIFICATIONS:

- | | |
|---|--|
| <p>①. EXTRUDED ALUMINUM ALLOY 6063-T5</p> <ul style="list-style-type: none">☐ (a) Mill Finish☐ (b) Clear Anodize☐ (c) Yellow Powder Coat☐ (d) Black Powder Coat <p>②. 1" INSERT STRIP (shop applied):</p> <ul style="list-style-type: none">☐ (a) Photo-Glo STNF☐ (b) Photo-Glo S9203☐ (c) Traction Yellow☐ (d) Traction Black <p>③. 1 1/2" INSERT STRIP (shop applied):</p> <ul style="list-style-type: none">☐ (a) Photo-Glo STNF☐ (b) Photo-Glo S9203☐ (c) Traction Yellow☐ (d) Traction Black☐ (e) Ribbed Aluminum | <p>④. ATTACHMENT:
Cast In Place (embedded shop applied)</p> <p>5. NOSING LENGTH: Equal To Tread Width</p> <p>6. ASTM 2072 / UL 1994</p> |
|---|--|

Safe-T-Nose®
WWW.SAFETNOSE.COM

1-855-723-6673
SALES@SAFETNOSE.COM



(971) 772-4553 | sales@nationalstair.com | www.nationalstair.com

RHINO TRED - STNS FLUSH MOUNT
MODEL # RT-PC150-SG-STNS



SCALE: N.T.S.

DWG #: RT-0.5